


Taperlock Cylindrical Plug Gages

SIZE ABOVE – INCLUDING	CLASS	TOL.	GO LENGTH	NO GO LENGTH	HANDLE #
.059 to .105 1.50mm to 2.67mm	XX	.00002	3/8"	3/16"	000
	X	.00004			000
	Y	.00007			000
	Z	.00010			000
.105 to .150 2.67mm to 3.81mm	XX	.00002	3/8"	7/32"	00
	X	.00004			00
	Y	.00007			00
	Z	.00010			00
.150 to .230 3.81mm to 5.84mm	XX	.00002	13/32"	9/32"	0
	X	.00004			0
	Y	.00007			0
	Z	.00010			0
.230 to .365 5.84mm to 9.27mm	XX	.00002	3/4"	5/16"	1
	X	.00004			1
	Y	.00007			1
	Z	.00010			1
.365 to .510 9.27mm to 12.95mm	XX	.00002	1"	3/8"	2
	X	.00004			2
	Y	.00007			2
	Z	.00010			2
.510 to .825 12.95mm to 20.96mm	XX	.00002	1-1/4"	1/2"	3
	X	.00004			3
	Y	.00007			3
	Z	.00010			3
.825 to 1.135 20.96mm to 28.83mm	XX	.00003	1-1/2"	5/8"	4
	X	.00006			4
	Y	.00009			4
	Z	.00012			4
1.135 to 1.510 28.83mm to 38.35mm	XX	.00003	1-5/8"	3/4"	5
	X	.00006			5
	Y	.00009			5
	Z	.00012			5

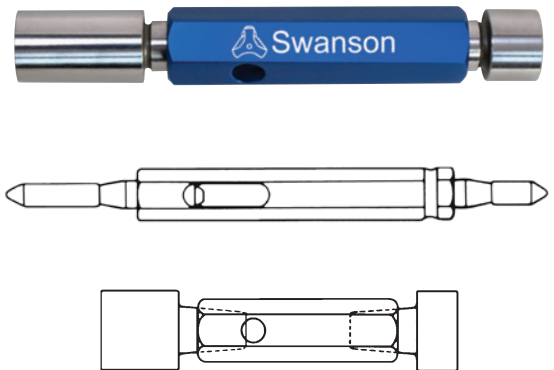

Direction of Tolerances

GO – Unilateral (Plus)
NO GO – Unilateral (Minus)

**Chrome and Carbide
also available**

CALL SWANSON FOR PRICING

How to Order

Please specify:

1. Quantity desired.
2. Exact diameter(s).
3. Tolerance.
4. GO or NO GO.
5. Handles (Single or Double End).
6. Marking.